

ALIMENTATIONS MODULAIRES SUR RAIL DIN

24V DC - non secourues

- Sorties (+/-) doublées
- Protection par fusible électronique (PTC)
- LED présence tension de sortie
- 5 modules
- Isolation classe II



ADD2430


CARACTÉRISTIQUES PRODUITS

Références						
ADD2430	220V - 240V AC	24V DC	1,25 A	30 W	-10 +50° C	20
ADD2445	220V - 240V AC	24V DC	1,88 A	45 W	-10 +50° C	20
ADD2460	220V - 240V AC	24V DC	2,5 A	60 W	-10 +50° C	20

 Conforme EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 +A2: 2013

 Conforme EN 55022: 2010, EN 55024: 2010, EN 61000-3-2: 2014, EN 61000-3-3: 2013

Code article	Description article	Poids en kg	Code douanier
ADD2430	Alimentation sur rail DIN 230V AC / 24V DC / 30W - 1,25A	0,3	85044090
ADD2445	Alimentation sur rail DIN 230V AC / 24V DC / 45W - 1,88A	0,3	85044090
ADD2460	Alimentation sur rail DIN 230V AC / 24V DC / 2.5A / 60W	0,3	85044090

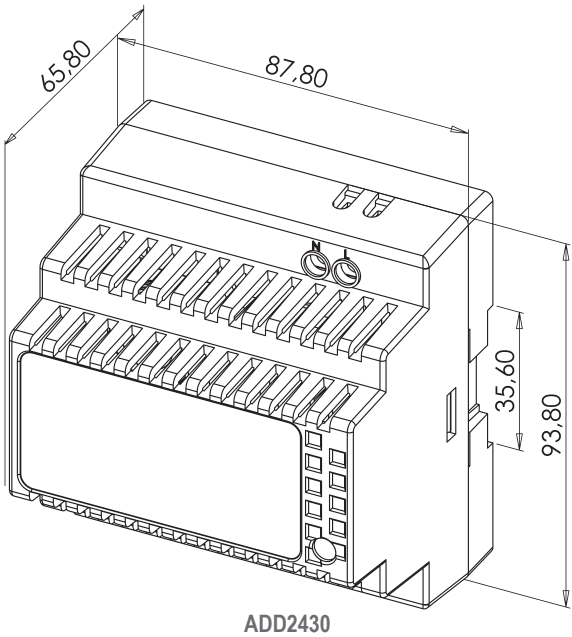

ADD2430

