

MODE D'EMPLOI
INSTALLATION INSTRUCTIONS
BEDIENUNGSANLEITUNG
GEBRUIKSAANWIJZING

ST_PSDIN3012_RANGE_A_150827

ALIMENTATIONS MODULAIRES SUR RAIL DIN
DIN RAIL MODULAR POWER SUPPLIES
MODULARE STROMVERSORGUNGEN
FÜR DIN HUTSCHIENENMONTAGE
ELEKTRISCHE VOEDINGEN OP DIN RAIL

PSDIN3012-PSDIN6012
PSDIN3024-PSDIN6024


12V / 24V DC




PSDIN				puissance nominale rated power Dauerstromentnahme nominale belasting		nombre de modules number of modules Teilungseinheiten modulen aantal
3012 6012	92 x 77 x 55,90	88-264V AC	12V DC	24 W 54 W	2 A 4,5 A	4,5
3024 6024			24V DC	36 W 60 W	1,5 A 2,5 A	

Plage d'ajustement de la tension:
Voltage adjustable range: 12 V = de/from/von/van 11.1V à/to/bis/tot 13.2V
Einstellbare Spannung: 24 V = de/from/von/van 21.6V à/to/bis/tot 26.4V
Regelbare spanning :

	-20 - +60° C		0,3 kg	Isolation classe II - Class II isolation Isolationsklasse II - Isolatie Klasse II
Montage sur RAIL DIN TS35/7,5 ou TS35/15 Admissible DIN-RAIL TS35/7,5 or TS35/15 Montage auf DIN TS35/7,5 oder TS35/15 HUTSCHIENE Te bevestigen op TS35/7,5 of TS35/15 DIN-RAIL		 Protections électroniques intégrées - Témoin lumineux Built-in protections - LED indicator Integrierter elektronischer Schutz - Anzeige LED Geïntegreerde elektronische beschermings - Indicatie LED		

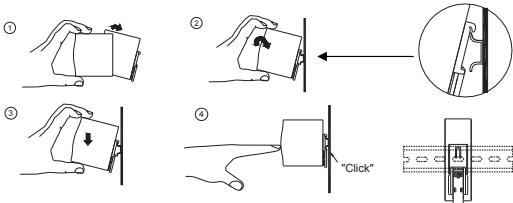

Potard d'ajustement de la tension
Adjustable voltage
Einstellbare Spannung
Regelbare spanning

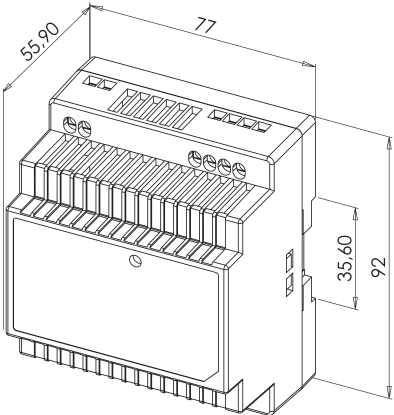

13b rue Saint-Exupéry ZA Aérodrome F-67500 HAGUENAU ☎ 33 (0)3 90 59 02 20 📠 33 (0)3 90 59 02 19

Sous réserve de modifications techniques - Technical changes reserved!
Änderungen vorbehalten! - onder voorbehoud van technische wijzigingen

